


Relay and Switch Device Specification Sheet

Relay and Switch Overview:

The primary function of an RS Device is enabling wireless operation of equipment wired to it. The RS Device operates as a control module for standard PipeBurst Pro 4 equipment but can manage any third-party device that meets the RS Device input criteria.

Relay and Switch Specs:

- Part #: RS400
- Dimensions: 3-3/8" W x 2-1/2" H x 1-1/4" D
- Zone State Button and LED Light Display
- Voltage: 5VDC
- Powered via AC Wall Adapter
- Internal Audible Alarm
- Wireless Frequency: 915MHz

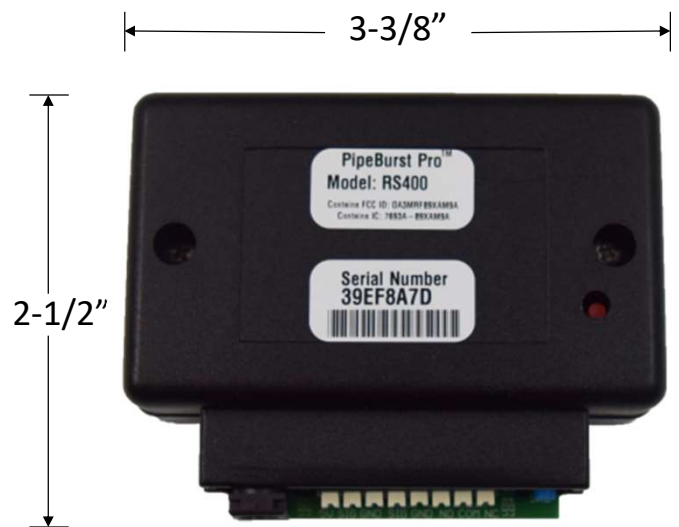

RS400

Relay and Switch Features

- Ability to shut valve
- Provide information to system from third party devices
- Button to open/close valve on demand
- 6 hour data recording interval



800.246.LEAK (5325)
info@pipeburstpro.com

©2020 GreenField Direct, LLC

